
# DETECTOR SWITCHES | DETECTOR SWITCHES



## [1120P]

### **Typical Specifications**

- 1.Rating : DC 30V 0.1A
- 2.Circuit:1C-1P
- 3.Timing: Non-Shorting
- 4.Travel: 0.8±0.1
- 5.Contact Resistance : 40 gf max
- 6.Operating Life : 50,000 Cycles

| PART     | MATERIAL         |
|----------|------------------|
| TERMINAL | PHOSPHOR BRONZE  |
| CASE     | NYLON 66         |
| CLIP     | PHOSPHOR-BRONZE  |
| ACTUATOR | ACETAL           |
| BRACKET  | ELECTRO TEMPLATE |
| COVER    | NYLON 66         |

#### Features

Light operating force : 40gf max.

Highly reliable contact through our own self-wiping leaf contact construction


Available for vertical and horizontal type

#### Application

Detecting the insertion of various media

Identification of tapes in VCR, casesette deck, etc

Detecting the operation of VCR, cassette mechannism,etc

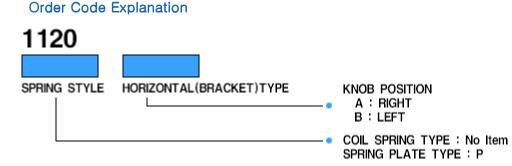

## OUTLINE DRAWING

